



AIR CONDITIONING JOBSITE INFORMATION SHEET

REMEMBER:

1. Check Metering device used.
2. Check Yes or No at drier locations.
3. Check Service Ports used.
4. Sat. Temp. is pressure converted to Temp?



FORMULA FOR SUPER HEAT

Vapor Line Temp.
 - Minus Sat Temp.


 Equals Super Heat

FORMULA FOR SUB COOLING

Sat Temp.
 - Minus Liquid Line Temp.

 Equals Sub Cooling

Indoor Temp. Leaving
 DB:
 WB:

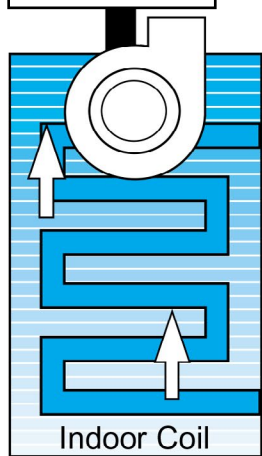

Indoor Temp. Entering
 DB:
 WB:

Drain Trap
 Yes No

STATIC PRESSURE READINGS

BLOWER TAPS IF RH2T

T5 T4 T3 T2 T1

SUPPLY ESP:
 RETURN ESP:
 TOTAL ESP:

Liquid Line Temp.

Metering Device
 TXV EEV

Vapor Line Temp.

VAPOR LINE

Liquid Line Temp.

Liquid Line Temp.

LIQUID LINE

Drier
 Yes No
 Service Port

Drier
 Yes No
 Service Port

Vapor Line Temp.

Service Port

Drier
 Yes No
 Service Port

Vapor Line Temp.

Hot Gas Line Temp.

Outdoor Coil

Outdoor Temp.

*SEE NOTE

ADDITIONAL INFORMATION

1. Liquid Line Size:
2. Liquid line Length Vertical/Horizontal:
3. Vapor Line Size:
4. Vapor Line Length: Vertical/Horizontal:
5. Vertical Separation Below/Above:
6. Air Handler CFM: Method Used for CFM:

Yes No

Drier

VOLTS:

AMPS/OHMS:

C:

S:

R:

Compressor